



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>H04B 7/06</b></p>	<p><b>A2</b></p>	<p>(11) International Publication Number: <b>WO 95/32558</b> (43) International Publication Date: 30 November 1995 (30.11.95)</p>
<p>(21) International Application Number: PCT/FI95/00283 (22) International Filing Date: 23 May 1995 (23.05.95) (30) Priority Data: 942404 24 May 1994 (24.05.94) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puistotie 1, FIN-02600 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): HEIKKINEN, Eero [FI/FI]; Urpiaisentie 41, FIN-90540 Oulu (FI). KIISKI, Matti [FI/FI]; Mustalinnuntie 21, FIN-90460 Oulunsalo (FI). (74) Agent: TEKNOPOLIS KOLSTER OY; c/o Oy Kolster Ab, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>		<p>(81) Designated States: AU, CN, DE, GB, JP, NO, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>In English translation (filed in Finnish). Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: A METHOD FOR IMPROVING CONNECTION QUALITY IN A CELLULAR RADIO SYSTEM, AND A BASE STATION</p>		
<p>(57) Abstract</p> <p>The present invention relates to a base station, and a method for improving connection quality in a cellular radio system, which system comprises in each cell at least one base station (BS), which communicates with the subscriber terminal equipments (MS) located within its area, and which sends out transmissions by using at least one carrier frequency, and in which system the signal transmitted at each frequency is divided on the time division principle into a frame consisting of several time slots, and which base stations transmit information on themselves to the subscriber terminal equipments. To improve the quality of the connection between the base station and a subscriber terminal equipment, the antenna via which the signal intended for the terminal equipments of the base station is transmitted is changed on the time division principle in such a manner that the base station sends out transmissions via one antenna at a time for a certain predetermined period, after which the antenna to be used is changed.</p> <div data-bbox="763 1113 1510 1491"> </div>		

Best Available Copy

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Larvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

A method for improving connection quality in a cellular radio system, and a base station

5           The present invention relates to a method for  
improving connection quality in a cellular radio system,  
which system comprises in each cell at least one base  
station, which communicates with the subscriber terminal  
equipments located within its area, and which sends out  
10       transmissions by using at least one carrier frequency,  
and in which system the signal transmitted at each  
frequency is divided on the time division principle into  
a frame consisting of several time slots, and which base  
stations transmit information on themselves to the  
subscriber terminal equipments.

15           In cellular radio systems, the speech or data  
information of a user between a base station and a  
subscriber terminal equipment is transmitted by using  
a traffic channel. In addition, several control messages  
and system information are required between the terminal  
20       equipment and the base station. In order for this type  
of information to be transmitted, dedicated control  
channels are required. In the GSM system, for instance,  
the BCCH channel is used for transmitting call set-up  
information from a base station to terminal equipments.

25           In cellular radio systems, the quality of the  
radio channel between a base station and a subscriber  
terminal equipment varies as a function of place and  
time. The field generated by a base station antenna does  
not attenuate homogeneously according to distance, but  
30       the field strength varies depending on the location even  
if the distance from the antenna remains the same. These  
variations are due to the fact that the transmitting and  
receiving antennas are not often within direct sight  
with each other, but there are obstructions caused by  
35       the terrain or buildings in the line of sight. The

environment thus causes fades and reflections to a transmitted signal, and the signal received by a subscriber terminal equipment is often a sum of signal components propagated along several different paths.

5 Local variations in signal strength may be extremely great.

Local fades in field strength cause calls to be interrupted in the present-day cellular radio systems as connection quality suddenly deteriorates, and failed

10 call set-up attempts, of which there may be 5 - 10% of all cases.

In the network planning of cellular radio systems, local variations in field strength must be taken into account in order to be able to minimize call interruptions and call set-up problems. The solution

15 according to prior art is to increase the transmission power of a cell if the cell contains fade areas, or to increase the number of transmitters in problematic areas. Most often, the transmission power of a cell is

20 increased to exceed the power required in normal areas in order to obtain satisfactory field strength in fade areas. However, this leads to the fact that the field is even unnecessarily strong in good areas and that the reuse of frequencies is complicated, as a result of

25 which the total capacity of the system is decreased.

A method for avoiding fades is to use frequency hopping in the system, different time slots being thus transmitted at different frequencies according to a predetermined sequence. Frequency hopping is, however,

30 expensive to implement, and in addition, it cannot however be always used, as for instance in the GSM system at the frequency where BCCH information is transmitted.

The object of the present invention is thus to enable better connection quality in fade areas without the above-mentioned disadvantages and heavy expenses.

5 This is achieved with the method described in the introduction, characterized in that the antenna via which the signal intended for the terminal equipments of a base station is transmitted is changed on the time division principle in such a manner that the base station sends out transmissions via one antenna at a  
10 time for a certain predetermined period, after which the antenna to be used is changed.

The invention further relates to a base station, intended to be used in a cellular radio system comprising in each cell at least one base station, which  
15 communicates with the subscriber terminal equipments located within its area, and which sends out transmissions by using at least one carrier frequency, and in which system the signal transmitted at each frequency is divided on the time division principle into  
20 a frame consisting of several time slots, and which base station transmits information on itself to the subscriber terminal equipments. The base station of the invention is characterized in that the base station comprises means for changing the antenna via which the  
25 signal intended for the terminal equipments of the base station is transmitted, on the time division principle in such a manner that transmissions are sent out via one antenna at a time for a certain predetermined period, after which the antenna to be used is changed.

30 The method of the invention is based on the fact that antennas situated in different locations produce different fields, i.e. the minimums of field strength are not produced in the same locations, because the signals originating from antennas situated in  
35 different locations do not propagate along the same

path. The method of the invention differs from the conventional antenna diversity in that at each time instant, the signal is transmitted from only one antenna at a time. The antenna used at a given moment is changed at predetermined time instants. According to the preferred embodiment of the invention, one entire frame is transmitted from each antenna, after which the antenna is changed. The invention can be applied particularly advantageously in the GSM system at the frequency where the BCCH signal is transmitted. According to the second embodiment of the invention, the antenna is changed at each time slot.

In the following, the invention will be described in more detail with reference to the examples according to the accompanying drawings, in which

Figure 1 shows a cellular radio system in which the method of the invention can be applied,

Figure 2 illustrates the structure of a TDMA frame of the GSM system,

Figure 3 illustrates the structure of the base station of the invention by means of a block diagram.

Figure 1 illustrates a cellular radio system in which the method of the invention can be applied. The cellular radio system comprises in each cell at least one base station BS, which communicates with the subscriber terminal equipments MS located within its area. Speech and data traffic are handled by using a traffic channel, and control messages are transmitted by using control channels. The method of the invention can be applied in any cellular radio system employing the time division TDMA multiple access method. In the following, the invention will be described as applied in the GSM system, without restricting the invention to it, however.

In the GSM system, a TDMA frame comprises eight time slots. The structure of the frame is illustrated in Figure 2. The time slots of the frame are numbered from 1 to 7. Several carrier frequencies may be used in one cell. A GSM cell always employs one carrier frequency at which the first time slot of the TDMA frame, this time slot being indicated by numeral 0, is used for transmitting call set-up information, i.e. the BCCH channel, from a base station to subscriber terminal equipments. The base station also uses the same time slot for acknowledging a call set-up signal transmitted by a terminal equipment. While in idle mode, terminal equipments monitor the BCCH channel. They must always be aware of the frequency at which the BCCH signal is transmitted. Accordingly, there is no frequency hopping at the BCCH carrier frequency.

The method of the invention employs two or more antennas, which are connected with a base station transmitter. The signal to be transmitted is transmitted via one antenna at a time, but the antenna to be used is changed either randomly or according to a predetermined sequence. The field strength of the signal received by a terminal equipment thus varies according to the variation of the transmitting antenna, and the probability that the terminal equipment is constantly exposed to fades is significantly reduced. This is based on the fact that since the signals transmitted from antennas situated in different locations arrive along different paths to the terminal equipment, they attenuate in different ways. If a signal arriving via one antenna has faded, signals transmitted via the other antennas have probably not faded. The error correction methods used in the cellular radio systems, interleaving and coding are able to correct possibly missing or low-

quality frames in a received signal, if there are not many of this type of frames arriving successively.

In the preferred embodiment of the invention, the method is applied at the carrier frequency where the BCCH signal is transmitted in the first time slot. According to the method, a base station transmits one frame by using the same antenna, after which the transmitting antenna is changed for the period required by the subsequent frame. The successful reception of call set-up signals is thus improved. As measured in terms of bit errors, the quality of a signal received by a terminal equipment is improved by 3 dBc when two antennas are used and by 5 dBc when three antennas are used in a typical city environment, in the case of a slow-moving terminal equipment.

In the second embodiment of the method of the invention, the antenna is changed time slot-specifically, i.e. at each time slot the antenna is changed either randomly or according to a sequence in such a manner that in successive frames, the same time slots are transmitted via different antennas. In this case, where the antenna is thus changed connection-specifically, the quality measurement of the connection between a subscriber terminal equipment and a base station can be utilized when selecting the transmitting antenna, either in the base station or the terminal equipment. The base station which receives a signal from a subscriber terminal equipment with several antennas can measure the quality of a signal received with each antenna and select the transmitting antenna on the basis of this information.

In the second embodiment of the method of the invention, the quality measurement performed by a subscriber terminal equipment is utilized. The terminal equipment constantly reports information on the



connection quality to the base station, and the base station can use the antenna with the use of which the connection quality is better. In practice, this can be implemented in the case of two antennas, for instance, in such a manner that the base station sends out a transmission for a period of three successive time slots with the first antenna and for a period of three time slots with the second antenna, and receives the connection quality measurements reported by the terminal equipment. On the basis of this information, the base station sees which antenna provides a better connection and emphasizes this antenna in future by transmitting for instance four successive time slots with the better antenna and two time slots with the worse antenna, until the measurement results show that the emphasizing of the antennas should be changed. With this type of connection-specific use, the benefit gained in connection quality on each traffic channel is in the range of 4 - 6 dBc.

The structure of the base station of the invention is illustrated by means of a block diagram in Figure 3. The base station of the invention comprises means 30 for generating a baseband signal, the output signal of these means being applied to modulating means 31, from which the carrier frequency signal is applied to an output amplifier 32. The base station of the invention further comprises means 33, by which the antenna used at each time instant can be selected from the available antennas 34a - 34c. The base station of the invention comprises more than one antennas. The number of the antennas is not restricted; the more antennas are used, the better performance is achieved. The base station also comprises means 35, by means of which the above-mentioned components are controlled. The means 35 also control the switching means 33 in such a

manner that at each time instant, a desired antenna sends out a transmission. The switching means 33 are synchronized with the frame structure of the signal to be transmitted. The switching means 33 can also be  
5 located before the output amplifier 32. The base station of the invention may also comprise more than one baseband and modulating means, the signals of which are combined before the output amplifier 32.

Naturally, the base station to be implemented  
10 also comprises other components, such as filters and converters, but since they are not essential as regards the invention, they are not shown in the figure for the sake of simplicity.

Even if the invention has been described above  
15 with reference to the examples according to the accompanying drawings, it will be apparent that the invention is not so restricted but it can be modified in various ways within the scope of the inventive concept disclosed in the appended claims.

## Claims

1. A method for improving connection quality in a cellular radio system, which system comprises in each cell at least one base station (BS), which communicates with the subscriber terminal equipments (MS) located within its area, and which sends out transmissions by using at least one carrier frequency, and in which system the signal transmitted at each frequency is divided on the time division principle into a frame consisting of several time slots, and which base stations transmit information on themselves to the subscriber terminal equipments, c h a r a c t e r - i z e d in that the antenna via which the signal intended for the terminal equipments of a base station is transmitted is changed on the time division principle in such a manner that the base station sends out transmissions via one antenna at a time for a certain predetermined period, after which the antenna to be used is changed.

2. A method according to claim 1, c h a r - a c t e r i z e d in that the antenna to be used is changed in such a manner that successive frames are transmitted via different antennas.

3. A method according to claim 2, c h a r - a c t e r i z e d in that the antenna to be used is changed at the frequency where a base station (BS) transmits information on itself to subscriber terminal equipments (MS).

4. A method according to claim 1, c h a r - a c t e r i z e d in that the antenna used at each time instant is randomly selected.

5. A method according to claim 1, c h a r -

a c t e r i z e d in that the antenna used at each time instant is selected according to a predetermined sequence.

5           6. A method according to claim 1, c h a r -  
a c t e r i z e d in that the antenna used during each time slot is changed independently irrespective of the other time slots.

10           7. A method according to claim 6, c h a r -  
a c t e r i z e d in that the antenna used during each time slot at each time instant is selected on the basis  
of the connection quality information originating from a subscriber terminal equipment (MS).

15           8. A method according to claim 6, c h a r -  
a c t e r i z e d in that the antenna used during each time slot at each time instant is selected on the basis  
of the quality of the connection received by a base station (BS) by means of different antennas from a subscriber terminal equipment (MS).

20           9. A base station, intended to be used in a cellular radio system comprising in each cell at least one base station (BS), which communicates with the subscriber terminal equipments (MS) located within its area, and which sends out transmissions by using at least one carrier frequency, and in which system the  
25           signal transmitted at each frequency is divided on the time division principle into a frame consisting of several time slots, and which base station transmits information on itself to the subscriber terminal equipments, c h a r a c t e r i z e d in that the base  
30           station comprises means (33, 35) for changing the antenna via which the signal intended for the terminal equipments of the base station is transmitted, on the time division principle in such a manner that transmissions are sent out via one antenna at a time for

11

a certain predetermined period, after which the antenna  
to be used is changed.

1/1

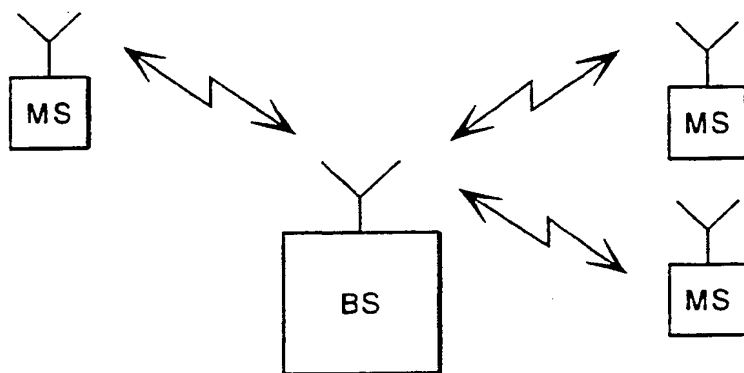


Fig. 1




Fig. 2


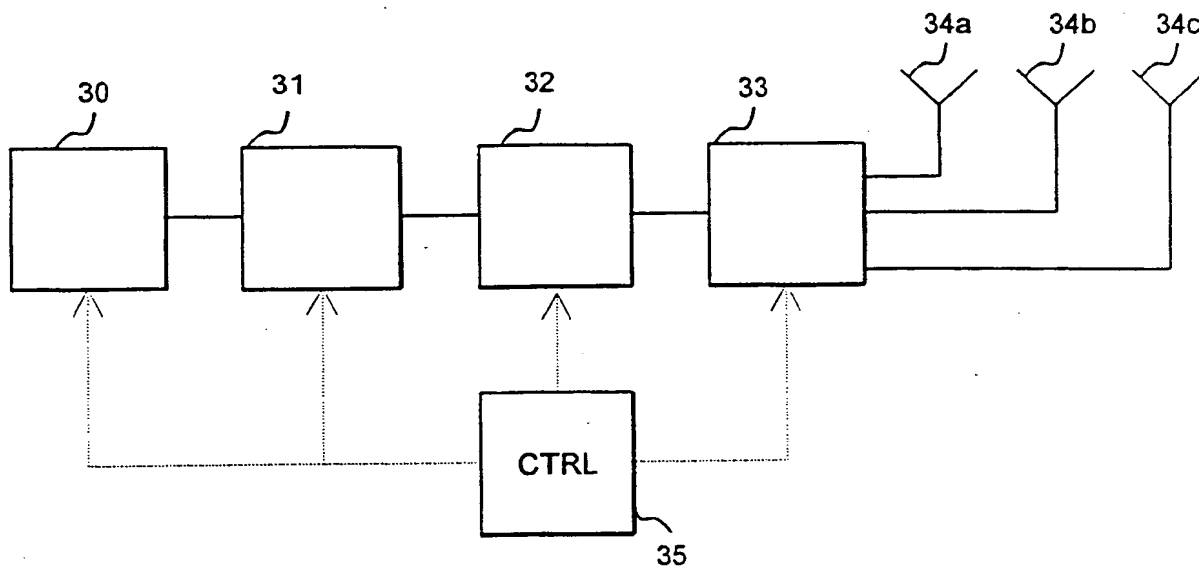


Fig. 3

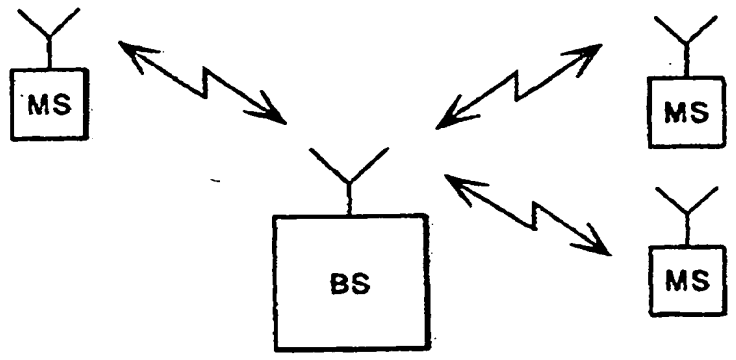

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04B 7/06</b>	<b>A3</b>	(11) International Publication Number: <b>WO 95/32558</b> (43) International Publication Date: 30 November 1995 (30.11.95)
(21) International Application Number: PCT/FI95/00283 (22) International Filing Date: 23 May 1995 (23.05.95) (30) Priority Data: 942404                      24 May 1994 (24.05.94)                      FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Makkytän puisto 1, FIN-02600 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): HEIKKINEN, Eero [FI/FI]; Urpiaisentie 41, FIN-90540 Oulu (FI). KIISKI, Matti [FI/FI]; Mustalinnuntie 21, FIN-90460 Oulunsalo (FI). (74) Agent: TEKNOPOLIS KOLSTER OY; c/o Oy Kolster Ab, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AU, CN, DE, GB, JP, NO, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published: <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i> <i>In English translation (filed in Finnish).</i> (88) Date of publication of the international search report: 28 December 1995 (28.12.95)
(54) Title: A METHOD FOR IMPROVING CONNECTION QUALITY IN A CELLULAR RADIO SYSTEM, AND A BASE STATION		
(57) Abstract <p>The present invention relates to a base station, and a method for improving connection quality in a cellular radio system, which system comprises in each cell at least one base station (BS), which communicates with the subscriber terminal equipments (MS) located within its area, and which sends out transmissions by using at least one carrier frequency, and in which system the signal transmitted at each frequency is divided on the time division principle into a frame consisting of several time slots, and which base stations transmit information on themselves to the subscriber terminal equipments. To improve the quality of the connection between the base station and a subscriber terminal equipment, the antenna via which the signal intended for the terminal equipments of the base station is transmitted is changed on the time division principle in such a manner that the base station sends out transmissions via one antenna at a time for a certain predetermined period, after which the antenna to be used is changed.</p> 		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04B 7/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 8808650 A1 (MOTOROLA, INC.), 3 November 1988 (03.11.88), page 11, line 1 - line 29; page 12, line 1 - page 13, line 5, figures 5,9,12, abstract	1-9
Y	CH 682195 A5 (ASCOM TECH AG), 30 July 1993 (30.07.93), page 2, line 37 - line 41, abstract	1-9
A	DE 4236089 A1 (SIEMENS AG), 28 April 1994 (28.04.94), abstract	1-9

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

28 November 1995

Date of mailing of the international search report

28-11-1995

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Elisabet Åselius

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 95/00283

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	EP 0668668 A1 (MATSUSHITA ELECTRIC INDUSTRIAL CO. LTD.), 16 February 1994 (16.02.94), abstract  -- -----	1-9

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

30/10/95

International application No.  
PCT/FI 95/00283

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A1- 8808650	03/11/88	EP-A, A, A 0288904 FI-B- 94693 NO-B, C- 175695 US-A- 4797947	02/11/88 30/06/95 08/08/94 10/01/89
CH-A5- 682195	30/07/93	DE-A- 4219677	04/02/93
DE-A1- 4236089	28/04/94	NONE	
EP-A1- 0668668	16/02/94	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**